




# SKID STEER LOADERS

RADIAL & VERTICAL LIFT



1050R ▲ 1350R ▲ 1500R ▲ 1650R ▲ 1900R ▲ 2200R ▲ 2600R ▲ 2700V NXT2 ▲ 3300V NXT2 ▲ 4000V

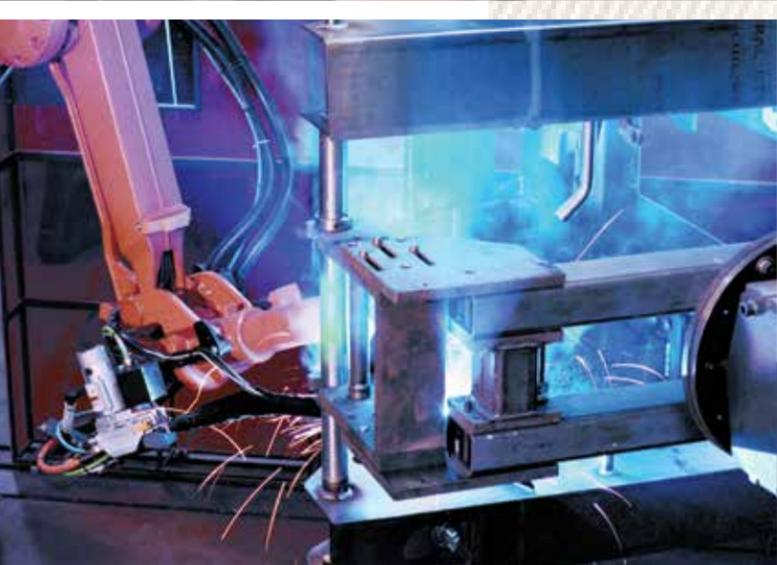

WHAT BEGAN IN THE 19TH CENTURY AS AN AGRICULTURAL IMPLEMENT MANUFACTURER HAS GROWN INTO A 21ST CENTURY EQUIPMENT POWERHOUSE - MUSTANG COMPACT EQUIPMENT.

Known in the early years as the Owatonna Manufacturing Company, Mustang was among the first to make what is known today as the skid steer loader. Since that time, Mustang has combined old-school experience with innovative processes to offer one of the broadest lines of compact equipment available today.

**MUSTANG. THE ORIGINAL WORKHORSE.**

## SKID STEERS: LEADING THE HERD

Building its first skid steer loader in 1965, Mustang was a true pioneer in the equipment world. Almost fifty years later, Mustang continues the tradition with one of the most complete lines of skid steer loaders on the market today.

With ten models ranging from 1,050 lbs. (476 kg) to an industry-leading 4,000 lbs. (1814 kg) of operating capacity, Mustang offers both radial- and vertical-lift models.



### RADIAL LIFT



1050R



1350R



1500R



1650R



1900R



2200R



2600R

### VERTICAL-LIFT



2700V  
NXT2



3300V  
NXT2



4000V



▲ RADIAL-LIFT and ▲ VERTICAL-LIFT

## LOADING OR LIFTING - WE HAVE THE MACHINE FOR YOU

### RADIAL LIFT

Offers enhanced performance in excavating, grading and digging below grade applications. Due to the radial lift path, the maximum reach is greater at the middle of the lift height.

#### SINGLE PIN DESIGN

Provides superior durability in loading and pushing applications.



#### DURABLE BUILD

Up to 4.5" (114 mm) width lift arm construction delivers superior strength and rigidity.

Lift heights from 108" [2731 mm] to 123" [3124 mm]

### VERTICAL LIFT

Providing more reach at full lift height is optimal for applications that require loading and stacking at high heights. By keeping the load closer to the machine, lift capacities are increased over radial-lift models.

#### SINGLE PLANE LIFT ARM

Design features large diameter pins aligned in a single plane for best-in-class vertical and lateral strength and rigidity.



Lift heights from 130.3" [3310 mm] to 144" [3647 mm]



#### EXCELLENT FORWARD REACH

The Mustang radial lift skid steer loaders provide excellent forward reach at the middle of the lift path. This provides excellent performance for loading flatbed trucks, backfilling or dumping over a wall.



#### X-TYPE

Upper-rear channel support welded to the top and between the load arms provides added rigidity without obstructing rear visibility.

#### TRUE VERTICAL

The 4000V has a true vertical lift path. The 2700V NXT2 and 3300V NXT2 have a near vertical path.



▲ POWER and ▲ PERFORMANCE

## COMPACT POWERHOUSE: ALL-NEW MODEL 1050R



1,050 lbs. [481 kg] RATED OPERATING CAPACITY

LIFT HEIGHT 108" [2731 mm]



IDEAL FOR SMALL, CRAMPED WORK SPACES

COUNTERWEIGHT/BUMPER

An optional counterweight on the 1050R boosts the maximum capacity to 1,668 lbs. (756 kg) and adds additional rear protection.



EASY TRANSPORT

With an operating weight of only 4,200 lbs. (1905 kg), the 1050R can be easily towed on a trailer behind a standard truck.



TIER IV YANMAR ENGINE

34.2 hp (kW)  
81 ft-lbs. (109 Nm) of torque

SELF LEVEL

This option keeps the bucket level throughout the raise/lift cycle.

LOW OVERALL HEIGHT

Gain access to low clearance sites and buildings with an overall height of 70.3" (1784 mm) on the model 1050R.



NARROW WIDTH

A narrow wheel offset option provides a machine width of only 48" (1232 mm) allowing entry through a backyard gate

OPERATOR STATION

Open Canopy  
Open Canopy with Door  
Enclosed Cab with Heat



▲ POWER and ▲ PERFORMANCE

## MID-SIZED MUSCLE: MODELS 1350R, 1500R & 1650R

**TIER IV YANMAR DIESEL ENGINE** Utilizing automatic regeneration and no fuel additives, these machines provide clean emissions with little to no input from the operator.

1350R	46.3 hp [34.5 kW]	107.8 ft.-lbs. [146 Nm]
1500R	46.3 hp [34.5 kW]	107.8 ft.-lbs. [146 Nm]
1650R	69.9 hp [52 kW]	178 ft.-lbs. [241 Nm]

### LEVEL II FOPS

Robust operator station design provides added protection for the operator.

### CAB-FORWARD DESIGN

All-new cab design is mounted forward on the chassis and the seat is mounted higher for exceptional visibility to the front, rear, sides and cutting edge.

### EASY ACCESS HYDRAULICS

Auxiliary hydraulics mounted on the top of the lift arm for easy access and fast attachment connect and disconnect.

### RATED OPERATING CAPACITY

	STANDARD	WITH COUNTERWEIGHT
1350R	1,350 lbs. [612 kg]	1,500 lbs. [680 kg]
1500R	1,500 lbs. [680 kg]	1,650 lbs. [748 kg]
1650R	1,650 lbs. [748 kg]	1,800 lbs. [816.5 kg]

### HYDRAULIC FLOW

1350R	17 gpm [64.4 L/min]
1500R	17 gpm [64.4 L/min]
1650R	18.9 gpm [71.4 L/min]

### DURABLE CYLINDERS

Induction-hardened, chrome-plated rods are used for lift and tilt cylinders, providing added durability

### LOW-PROFILE LIFT ARM

New lift arm increases the width between cylinders for better entry and sight lines.

### LIFT HEIGHT

1350R	109.6" [2784 mm]
1500R	119" [3023 mm]
1650R	119" [3023 mm]

### SELECTABLE SELF-LEVELING

Hydraulic self-leveling with on-off control for the operator is available as an option.

### DIGITAL COLOR DISPLAY

This information center shows real time fuel consumption, engine RPM, machine hours, engine diagnostic codes, warning indicators and much more.



▲ POWER and ▲ PERFORMANCE

## SUPERIOR SKID STEERS: MODELS 1900R, 2200R & 2600R

**TIER IV YANMAR DIESEL ENGINE** Utilizing automatic regeneration and no fuel additives, these machines provide clean emissions with little to no input from the operator.

1900R	69.3 hp [51.7 kW]	178 ft-lbs. [241 Nm]
2200R	72 hp [53.7 kW]	217 ft-lbs. [294 Nm]
2600R	72 hp [53.7 kW]	217 ft-lbs. [294 Nm]

### LEVEL II FOPS

Robust operator station design provides added protection for the operator.

### CAB-FORWARD DESIGN

All-new cab design is mounted forward on the chassis and the seat is mounted higher for class-leading visibility to the front, rear, sides and cutting edge.

### RADIAL-PISTON DRIVE MOTORS

Maintenance-free, radial-piston drive motors provide high start-up torque and maximum ground speed up to 12.5 mph [20 km/hr] for quick acceleration.

### FOUR CONTROL OPTIONS



### LONG WHEELBASE

A long wheelbase provides a smoother ride and a lower center of gravity for added stability.

1900R	42" [1067 mm]
2200R	43" [1092 mm]
2600R	49.5" [1257 mm]

### RATED OPERATING CAPACITY

	STANDARD	COUNTERWEIGHT
1900R	1,900 lbs. [862 kg]	2,110 lbs. [957 kg]
2200R	2,200 lbs. [998 kg]	2,370 lbs. [1075 kg]
2600R	2,600 lbs. [1179 kg]	2,780 lbs. [1261 kg]



### LOW-PROFILE LIFT ARM

A high-strength, low-profile design maximizes operator visibility to the front and side for added performance and safety.

### LIFT HEIGHT

1900R	120.5" [3061 mm]
2200R	123" [3124 mm]
2600R	123" [3124 mm]

### SELECTABLE SELF-LEVELING

Hydraulic self-leveling with on-off control for the operator is available as an option.

ENCLOSED, PRESSURIZED CAB WITH HEAT AND A/C *optional*



### BETWEEN-THE-TIRE

design keeps machine length short and compact. *Model 1900R*



### OVER-THE-TIRE

design provides wider access and improved visibility. *Models 2200R and 2600R*



# VERTICAL LIFT SKID STEER LOADERS

skid steer loaders - radial & vertical

▲ POWER and ▲ PERFORMANCE

## VERTICAL LIMIT: MODELS 2700V NXT2, 3300V NXT2, & 4000V

**TIER IV YANMAR DIESEL ENGINE** Utilizing automatic regeneration and no fuel additives, these machines provide clean emissions with little to no input from the operator.

2700V NXT2	72 hp [53.7 kW]	217 ft-lbs. [294 Nm]
3300V NXT2	72 hp [53.7 kW]	217 ft-lbs. [294 Nm]

### VERTICAL-LIFT BOOM

High-strength, low-profile design increases operator visibility and lifts the load in a nearly vertical path on the 2700V NXT2 and 3300V NXT2.

### FUEL ECONOMY

Equipped with an electronic engine control and electronic hand and foot throttles\*, these units can be operated at partial throttle for lower sounds levels and reduced fuel consumption.

### LEVEL II FOPS

Robust operator station design provides added protection for the operator.

### CAB-FORWARD DESIGN

All-new cab design is mounted forward on the chassis and the seat is mounted higher for exceptional visibility to the front, rear, sides and cutting edge.

### LONG WHEELBASE

A long wheelbase provides a smoother ride and a lower center of gravity for added stability.

2700V NXT2	49.5" [1257 mm]
3300V NXT2	49.5" [1257 mm]
4000V	54.6" [1387 mm]

### RATED OPERATING CAPACITY

	STANDARD	WITH COUNTERWEIGHT
2700V NXT2	2,700 lbs. [1225 kg]	3,000 lbs. [1361 kg]
3300V NXT2	3,300 lbs. [1497 kg]	N/A
4000V	4,000 lbs. [1814 kg]	N/A

\*foot throttle not available with hand/foot controls



### SELECTABLE SELF-LEVELING

Hydraulic self-leveling with on-off control for the operator is available as an option. Models 2700V NXT2 & 3300V NXT2

### "SOFT-SHIFT" DRIVE

Standard two-speed "soft-shift" drive provides smooth transitions between low/high speeds for increased operator comfort.

Models 2700V NXT2 & 3300V NXT2

### LIFT HEIGHT

2700V NXT2	130.3" [3310 mm]
3300V NXT2	131.2" [3332 mm]
4000V	143.6" [3647 mm]

### SELECTABLE SELF-LEVELING

Hydraulic self-leveling is standard equipment on the model 4000V.

### VERTICAL-LIFT BOOM

High-strength, low-profile design increases operator visibility and lifts the load in a true vertical path on the model 4000V.

### SMOOTH OPERATION

Hydraglide™ ride control system allows the lift arm to "float" when transporting loads, minimizing loss of material, and increased operator comfort.

**WORLD'S MOST POWERFUL SKID STEER LOADER**  
99 hp [74 kW]



▲ COMFORT and ▲ SAFETY

## GET IN CONTROL



HAND/FOOT



HANDS-ONLY



DUAL-HAND/JOYSTICK



### CHOOSE YOUR RIDE

A high-back, five-way adjustable seat comes as standard. Optional air-ride suspension seat or mechanical suspension seat provide enhanced comfort.

### DIGITAL COLOR DISPLAY

This information center shows real time fuel consumption, engine RPM, machine hours, engine diagnostic codes, warning indicators and much more. Models 1350R, 1500R & 1650R



## OPERATOR STATION COMFORT FEATURES



### POWER PORT

Standard 12-volt accessory plug keeps your electronics charged all day.



### CLIMATE CONTROL

Heat is standard on all cab models. Air conditioning is an option on select models.



### RADIO OPTION

Factory installed, this radio option customizes your cab.



### REAR VIEW CAMERA

Increase visibility to the rear of the machine with a rear view camera.



### SOUND REDUCTION MATERIAL

Suppresses outside noise for a quieter operator environment.

### MULTIPLE AIR VENTS

Six adjustable vents throughout the cab provide optimal temperature control.

### ADJUSTABLE SEAT

### PADDED, ADJUSTABLE ARMRESTS

### OPERATOR PRESENCE

The machine safety system allows operation only when the user is on the seat and the restraint bar is lowered into position.

### 2" (51 mm) SEATBELT

Optional 3" (76 mm) seatbelt available.

### CUP HOLDER

### ADJUSTABLE CONTROL TOWERS

extend and retract to provide personalized comfort.

R Series and Vertical-Lift Model Cab Shown

### PRESSURIZED CAB

An optional pressurized, sealed cab enclosure provides a cleaner, quieter operating environment.

### EASY ENTRY AND EXIT

Large entry area allows for easy access to the operator station.

### VISIBILITY

Wide opening in the front of the machine and large screen windows provide high visibility for increased safety and precise placement.

Refer to Page 24 for standard / optional features for each model

▲ MAINTENANCE and ▲ SAFETY




EXCELLENT VISIBILITY

FRONT

Model 1350R shown



LEFT SIDE

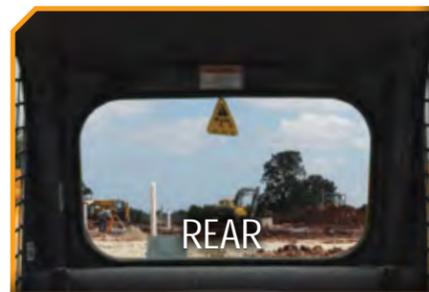

REAR



RIGHT SIDE

## EXCELLENT VIEWS FROM ALL SIDES FOR SAFETY AND PRECISE OPERATION

Excellent visibility to the front, sides and rear of the machine allow for precise placement of loads and reduced jobsite incidents. A high-mounted seat provides an excellent vantage point to the attachment and cutting edge.

## LESS DOWN TIME PUTS MONEY IN YOUR POCKET



### SWING-OUT COOLER

provides improved access to engine bay area. Available on select models.



1350R shown

### SWING-OUT REAR DOOR

Rear door easily opens on hinges on right side, allowing full access to filters and fluid reservoirs for servicing and maintenance.

### LARGE ENGINE COVER

Cover is hinged and positioned by gas-springs to assist lifting and holding in place, and allows for easy return to closed position.

### SAFETY RESTRAINT

Innovative restraint allows for safe and secure holding of the lift arm and cab while in the maintenance position.

### TILTABLE ROPS/FOPS ASSEMBLY

with gas-spring assist for easy internal access to the pumps, hydraulic valve bank and drive motors.

### FRONT CHASSIS CLEANOUT

Easy cleanout of foot area inside ROPS/FOPS.

▲ PERFORMANCE and ▲ VERSATILITY

### SELECTABLE SELF-LEVELING HYDRAULIC LIFT ACTION

keeps the bucket level throughout the raise/lift cycle. *Available on select models.*

### ELECTRONIC ATTACHMENT CONTROL OPTION

This factory-installed add-on allows for control of all attachments.



### PRECISION CONTROL

Standard proportional auxiliary hydraulic control gives the operator the ability to adjust attachment speeds with infinitely adjustable flow control. *Available on select models.*

Standard auxiliary detent (at full flow) allows the operator to set the hydraulic flow for continuous operation. *Available on select models.*

### STANDARD AUXILIARY HYDRAULIC FLOW RATES

2012	10.1 gpm (38.2 L/min)	1350R	17 gpm (64.4 L/min)	1900R	18.5 gpm (70 L/min)	2700V NXT2	23.5 gpm (89 L/min)
2026	14.5 gpm (55 L/min)	1500R	17 gpm (64.4 L/min)	2200R	23.5 gpm (89 L/min)	3300V NXT2	23.5 gpm (89 L/min)
		1650R	18.9 gpm (71.4 L/min)	2600R	23.5 gpm (89 L/min)	4000V	32 gpm (121 L/min)



### ALL-TACH®

All models feature the easy-to-use All-Tach® (universal-style) attachment mounting system compatible with most allied attachments.

**SINGLE LEVER DESIGN** for simplicity and strength.

**HEAVY DUTY MOUNTING PLATE** design for increased rigidity over tube style.



### POWER-A-TACH®

Hydraulic Power-A-Tach® all-weather system option allows users to quickly install and remove attachments. An operator leaves the seat only to connect auxiliary hydraulics. This system is compatible with most allied attachments.

To learn more about EDGE® Skid Steer Loader attachments, visit [edgeattach.com](http://edgeattach.com)

# EDGE®

With a wide variety of EDGE® attachments available, Mustang Skid Steer Loaders are easily transformed to meet your customers' needs.

PALLET FORKS



ROCK BUCKET



TRENCHER



RAKE



SNOW REMOVAL



AUGER



STUMP GRINDER



ROTOTILLER



MOWER



GRAPPLE BUCKET



GRADER BLADE



ANGLE BROOM



# MUSTANG®

## CUSTOMIZE YOUR RIDE

Mustang offers a variety of accessories and upgrades that can be easily added to new or used equipment. These can help enhance an existing unit or customize one for a particular job. Whether you are looking to add a counterweight, boost your hydraulics, or enclose a cab with heat and air conditioning, Mustang has the tools you need to craft your ideal ride.




TIRE OPTIONS



CAB ENCLOSURE



HYDRAGLIDE™

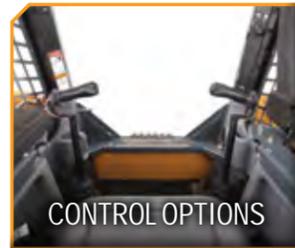

CONTROL OPTIONS



BEACON



RADIO



AIR CONDITIONING



HIGH-FLOW HYDRAULICS



TWO-SPEED DRIVE



POWER-A-TACH®



COUNTERWEIGHT



BACK-UP ALARM

## PROTECT YOUR INVESTMENT

Trust the experts.  
Make the *right* choice.

You expect year-to-year productivity from your Mustang equipment. That's why your trained and accredited Mustang dealer offers you the experience and skill necessary to maximize your equipment's performance. From routine maintenance to XPRT Genuine Parts to XPRT Protection Plan, your Mustang dealer is a partner you can count on to keep your equipment running smoothly.



## ROUTINE Maintenance



Eliminate unexpected repair costs and take better care of your Mustang equipment with the XPRT Protection Plan®. It ensures repairs will be made quickly with manufacturer-approved XPRT genuine parts by trained mechanics. If you're interested in saving money over the long haul, the XPRT Protection Plan® is an investment you should consider.

Features include:


- Affordable options available to meet your needs
- Select either powertrain component or full machine coverage for the right kind of protection for your equipment
- You decide the number of years and hours of coverage needed
- Enroll in the Plan on the day you purchase eligible equipment, or any time within six months or 500 hours from equipment registration



	1050R	1350R	1500R	1650R	1900R	2200R	2600R	2700V NXT2	3300V NXT2	4000V	
DIMENSIONS	A. Overall Operating Height – Fully Raised (mm)	139.6" (3546)	143.9" (3655)	152.6" (3876)	152.6" (3876)	158" (4013)	161" (4089)	161" (4089)	167.4" (4252)	172" (4369)	186.8" (4745)
	B. Height to Hinge Pin – Fully Raised (mm)	108.1" (2746)	109.6" (2784)	119" (3023)	119" (3023)	120.5" (3061)	123" (3124)	123" (3124)	130.3" (3310)	131.2" (3332)	143.6" (3647)
	C. Overall Height to Top of ROPS (mm)	70.3" (1786)	75.1" (1908)	76.7" (1948)	76.7" (1948)	80" (2032)	81" (2057)	81" (2057)	81" (2057)	82" (2083)	82" (2083)
	D. Overall Length with Bucket (mm)	114" (2896) w/ 55" Bucket	120.3" (3056) w/ 54" Bucket	122.1" (3101) w/ 61.5" Bucket	122.1" (3101) w/ 61.5" Bucket	127" (3226) w/ 66" Bucket	136.5" (3467) w/ 70" Bucket	143" (3632) w/ 70" Bucket	148" (3759) w/ 70" Bucket	152.5" (3874) w/ 74" Bucket	158.5" (4026) w/ 84" Bucket
	E. Dump Angle at Full Height	42°	40°	38°	38°	42°	40°	40°	42°	42°	31°
	F. Dump Height (mm)	84.5" (2146)	82.6" (2098)	93.7" (2380)	93.7" (2380)	91" (2311)	94" (2388)	94" (2388)	100" (2540)	98.5" (2502)	114.8" (2916)
	G. Dump Reach at Full Height (mm)	22.8" (579)	22.7" (577)	22.8" (579)	22.8" (579)	22.5" (572)	27" (686)	27" (686)	32" (813)	32" (813)	39.5" (1003)
	J. Rollback at Ground	29°	29°	28°	28°	26°	28°	28°	29°	29°	31°
	M. Rollback Angle at Full Height	99°	82°	99°	99°	96°	95°	95°	94°	94°	100°
	O. Seat to Ground Height (mm)	32.6" (828)	33.3" (846)	35.6" (904)	35.6" (904)	39" (991)	40" (1016)	40" (1016)	40" (1016)	41" (1041)	41.2" (1046)
	P. Wheelbase (mm)	34.5" (876)	37.6" (955)	38.9" (988)	38.9" (988)	42" (1067)	43" (1092)	49.5" (1257)	49.5" (1257)	49.5" (1257)	54.6" (1387)
	Q. Overall Width - Less Bucket ^ (mm)	48.4" (1229)	52.6" (1336)	63.2" (1605)	63.2" (1605)	64.5" (1638)	65.5" (1664)	65.5" (1664)	69.5" (1765)	72" (1829)	79.5" (2019)
	R. Bucket Width (mm)	55" (1404)	54" (1372)	61.5" (1562)	61.5" (1562)	66" (1676)	70" (1778)	70" (1778)	70" (1778)	74" (1880)	84" (2134)
	S. Ground Clearance to Chassis (mm)	6.0" (152)	7.9" (201)	6.3" (160)	6.3" (160)	6.5" (165)	8" (203)	8" (203)	8" (203)	9" (229)	7.3" (185)
	V. Overall Length - Less Bucket (mm)	88.9" (2258)	92.2" (2342)	93.9" (2385)	93.9" (2385)	94" (2388)	105" (2667)	111.5" (2832)	116.5" (2959)	119" (3023)	121.5" (3086)
	W. Departure Angle	26°	25°	21°	21°	25°	25°	25°	25°	25°	19°
	X. Clearance Circle – Front w/ Bucket (mm)	69.4" (1763)	72.5" (1842)	73.6" (1869)	73.6" (1869)	79" (2007)	87.5" (2223)	90" (2286)	90" (2286)	94.5" (2400)	88.5" (2248)
	Y. Clearance Circle – Front w/o Bucket (mm)	44.1" (1120)	44.1" (1130)	45.4" (1153)	45.4" (1153)	44.5" (1130)	52" (1321)	56" (1422)	56" (1422)	56" (1422)	50.8" (1290)
	Z. Clearance Circle – Rear (mm)	54.1" (1374)	54" (1372)	57.7" (1466)	57.7" (1466)	58.5" (1486)	60" (1524)	64" (1626)	66.5" (1689)	69.5" (1765)	70.5" (1791)
	Standard Specification Tire Size	27x8.5x15 HD	10.00x16.5 HD	10.00x16.5 HD	10.00x16.5 HD	10.00x16.5 HD	12.00x16.5 HD	12.00x16.5 HD	12.00x16.5 HD	14.00x17.5 HD	14.00x17.5 HD
ENGINE	Make	Yanmar	Yanmar	Yanmar	Yanmar	Yanmar	Yanmar	Yanmar	Yanmar	Cummins	
	Model	3TNV88C-KMS Tier IV	4TNV88C-KMS Tier IV	4TNV88C-KMS Tier IV	4TNV98C-NMS2 Tier IV	4TNV98C-NMS Tier IV	4TNV98CT-NMS Tier IV	4TNV98CT-NMS Tier IV	4TNV98CT-NMS Tier IV	4TNV98CT-NMS Tier IV	QSB 4.5 Tier III
	Gross Power (kW) @ rpm	34.7 hp (25.5) @ 2800	46.3 hp (34.5) @ 2800	46.3 hp (34.5) @ 2800	69.9 hp (52) @ 2500	69.3 hp (51.7) @ 2500	72 hp (53.7) @ 2500	72 hp (53.7) @ 2500	72 hp (53.7) @ 2500	72 hp (53.7) @ 2500	N/A
	Net Power (kW) @ rpm	33.1 hp (24.7) @ 2800	44.5 hp (33) @ 2800	44.5 hp (33) @ 2800	68.4 hp (51) @ 2500	68.4 hp (51) @ 2500	70.7 hp (52.7) @ 2500	70.7 hp (52.7) @ 2500	70.7 hp (52.7) @ 2500	70.7 hp (52.7) @ 2500	99 hp (74) @ 2200
	Maximum Torque (Nm) @ rpm	80 ft.-lbs. (108) @ 1680	107.8 ft.-lbs. (146) @ 1820	107.8 ft.-lbs. (146) @ 1820	178 ft.-lbs. (241) @ 1625	178 ft.-lbs. (241) @ 1625	217 ft.-lbs. (294) @ 1625	217 ft.-lbs. (294) @ 1625	217 ft.-lbs. (294) @ 1625	217 ft.-lbs. (294) @ 1625	326 ft.-lbs. (442) @ 1300
	Displacement (L)	100 cu.in. (1.6)	133.6 cu.in. (2.19)	133.6 cu.in. (2.19)	201.4 cu.in. (3.3)	202.6 cu.in. (3.3)	202.6 cu.in. (3.3)	202.6 cu.in. (3.3)	202.6 cu.in. (3.3)	202.6 cu.in. (3.3)	272 cu.in. (4.5)
HYDRAULIC SYSTEM	Auxiliary Hydraulics – Standard (L/min)	14.5 gpm (55)	17 gpm (64.4)	17 gpm (64.4)	18.9 gpm (71.4)	18.5 gpm (70)	23.5 gpm (90)	23.5 gpm (90)	23.5 gpm (89)	23.5 gpm (89)	32 gpm (121)
	High-Flow Auxiliary Hydraulics – Option (L/min)	N/A	N/A	N/A	25 gpm (94.6)	31.5 gpm (119)	35 gpm (132.5)	35 gpm (132.5)	35 gpm (132)	35 gpm (132)	40.8 gpm (154)
	Reservoir Capacity (L)	8 gal. (30.3)	10 gal. (37.9)	11 gal. (41.6)	11 gal. (41.6)	8 gal. (30.3)	8 gal. (30.3)	8 gal. (30.3)	10.5 gal. (40)	10.5 gal. (40)	16.75 gal. (63)
ELECTRICAL SYSTEM	Battery (CCA)	12-volt (675)	12-volt (950)	12-volt (950)	12-volt (950)	12-volt (950)	12-volt (950)	12-volt (950)	12-volt (950)	12-volt (950)	12-volt (950)
	Starter (kW)	12-volt (2.3)	12-volt (3.0)	12-volt (3.0)	12-volt (3.0)	12-volt (3.0)	12-volt (3.0)	12-volt (3.0)	12-volt (3.0)	12-volt (3.0)	12-volt (3.0)
	Alternator	40-amp	100-amp	100-amp	100-amp	95-amp	95-amp	95-amp	95-amp	95-amp	130-amp
CAPACITIES / WEIGHTS	Rated Operating Capacity <sup>a</sup> (kg)	1,050 lbs. (476)	1,350 lbs. (612)	1,500 lbs. (680)	1,650 lbs. (748)	1,900 lbs. (862)	2,200 lbs. (998)	2,600 lbs. (1179)	2,700 lbs. (1225)	3,300 lbs. (1497)	4,000 lbs. (1814)
	Rated Op. Capacity with Opt. Counterweight <sup>b</sup> (kg)	1,175 lbs. (533)	1,500 lbs. (680)	1,650 lbs. (748)	1,800 lbs. (816.5)	2,110 lbs. (957)	2,370 lbs. (1075)	2,780 lbs. (1261)	3,000 lbs. (1361)	N/A	N/A
	Fuel Tank (L)	10.4 gal. (39.4)	16.5 gal. (62.5)	16.5 gal. (62.5)	16.5 gal. (62.5)	16.5 gal. (62.5)	18 gal. (68.1)	21.5 gal. (81.4)	24.5 gal. (92.7)	24.5 gal. (92.7)	31.25 gal. (118)
	Travel Speed – Maximum (km/hr)	5.9 mph (9.5)	8.0 mph (12.9)	7.4 mph (11.9)	7.8 mph (12.6)	7.5 mph (12.1)	8.0 mph (12.9)	8.0 mph (12.9)	7.4 mph (12)	8.1 mph (13.0)	6.5 mph (10.5)
	Travel Speed w/ Two-Speed Option - Maximum (km/hr)	N/A	N/A	N/A	12.1 mph (19.5)	12.5 mph (20.1)	11.9 mph (19.2)	11.9 mph (19.2)	11.9 mph (19.2)	12.2 mph (19.6)	11.2 mph (18)
	Operating Weight <sup>c</sup> – Approximate (kg)	4,200 lbs. (1905)	5,130 lbs. (2327)	5,930 lbs. (2690)	6,165 lbs. (2796)	6,880 lbs. (3121)	7,980 lbs. (3620)	8,200 lbs. (3719)	8,150 lbs. (3697)	9,090 lbs. (4123)	11,100 lbs. (5035)


## REFERENCE DIAGRAMS

### RADIAL-LIFT

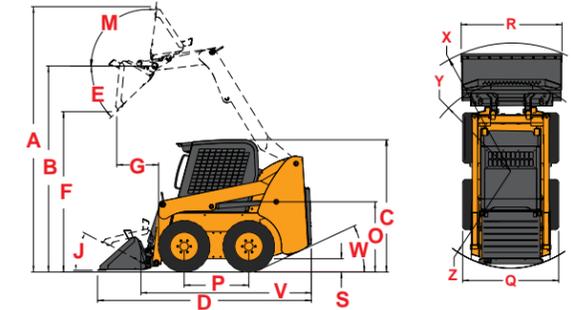


### VERTICAL-LIFT

#### 2700V NXT2 / 3300V NXT2

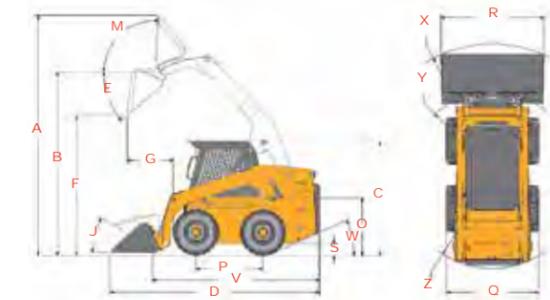

#### 4000V

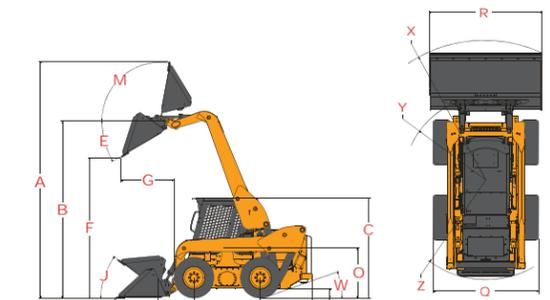

- A Overall width is dependent upon the amount of wheel offset.
- B Per SAE J818, SAE J732, and ISO 14397
- C Weight of base unit with standard equipment, standard tires (heavy-duty flotation), standard dirt-construction bucket and 175 lbs. (79 kg) operator.

## ORIGINAL WORKHORSE

Mustang authorized dealers offer a full line of compact equipment, backed up by exceptional sales, service and parts experience.

For more information on Mustang equipment, visit our website:

[mustangmfg.com](http://mustangmfg.com)

Mustang reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly.

Mustang reserves the right to add improvements or make changes in specifications at any time without notice or obligation.



Mustang Mfg

<sup>1</sup> Adjustable control towers and armrests available on joystick and hand/foot control configurations only.

<sup>2</sup> Foot throttle on hand control units only.

<sup>3</sup> Hydraglide™ Ride Control is standard with pilot controls and hands only controls.



West Bend, WI 53095 U.S.A.

Tel: 262-334-9461 | Fax: 262-338-7517

○ STANDARD ● OPTIONAL

	1050R	1350R	1500R	1650R	1900R	2200R	2600R	2700V NXT2	3300V NXT2	4000V
<b>CONTROLS</b>										
Hands-Only	○	●	●	●						
Dual-Hand Controls					●	●	●	●	●	●
Hand/Foot Controls	○	●	●	●	●	●	●	●	●	●
Joystick Controls				●	●	●	●	●	●	●
<b>ENGINE</b>										
Engine Auto-Shutdown System		○	○	○	○	○	○	○	○	○
Engine Block Heater	○	●	●	●	●	●	●	●	●	●
Turbo-Charged Engine						○	○	○	○	○
Swing-out Cooler		○	○	○						○
<b>HYDRAULICS</b>										
Auxiliary Hydraulics	○	○	○	○	○	○	○	○	○	○
High-Flow Auxiliary Hydraulics					●	●	●	●	●	●
<b>OPERATOR STATION</b>										
Adjustable Arm Rests / Control Towers <sup>1</sup>					○	○	○	○	○	○
Heating	●	●	●	●	●	●	●	●	●	●
Air Conditioning		●	●	●	●	●	●	●	●	●
High-Back Adjustable Seat	○	○	○	○	○	○	○	○	○	
Suspension Seat - Mechanical	●	●	●	●	●	●	●	●	●	○
Suspension Seat - Air Ride		●	●	●	●	●	●	●	●	●
Cab Enclosure	●	●	●	●	●	●	●	●	●	●
Foot and Hand Throttles <sup>2</sup>	○	○	○	○	○	○	○	○	○	○
Full Instrumentation	○	○	○	○	○	○	○	○	○	○
Horn	●	○	○	○	○	○	○	○	○	○
Integral Access Plate (removable)	○	○	○	○	○	○	○	○	○	○
Operator Restraint Bar	○	○	○	○	○	○	○	○	○	○
ROPS/FOPS Level II Overhead Guard	○	○	○	○	○	○	○	○	○	○
Sound Reduction Material	○	○	○	○	○	○	○	○	○	○
Work Lights - Front and Rear	○	○	○	○	○	○	○	○	○	○
<b>PERFORMANCE</b>										
All-Tach® Attachment Mounting System	○	○	○	○	○	○	○	○	○	○
Power-A-Tach® Attachment Mounting System		●	●	●	●	●	●	●	●	●
Anti-Vandalism Protection	○	○	○	○	○	○	○	○	○	○
Back-Up Alarm	●	●	●	●	●	●	●	●	●	●
Brake Control (Auto / Manual)	○	○	○	○	○	○	○	○	○	○
Counterweight	●	●	●	●	●	●	●	●	○	
Hydraglide™ Ride Control <sup>3</sup>			●	●	●	●	●	○	○	○
Hydraloc™ Safety System	○	○	○	○	○	○	○	○	○	○
Hydrostatic Drive	○	○	○	○	○	○	○	○	○	○
Lift Arm Support Device	○	○	○	○	○	○	○	○	○	○
Switchable Self-Leveling Hydraulic Lift Action	●	●	●	●	●	●	●	●	○	○
Two-Speed Drive				●	●	●	●	○	○	○