IN-CAB BACKHOE



EDGE® IN-CAB BACKHOE

The EDGE in-cab backhoe attachment allows the operator to remain in the comfort and protection of the cab while operating the backhoe and the skid loader and track loader controls. Increase production and operator cycle times by controlling the stabilizers, boom, dipper, bucket and also move the machine without ever leaving the cab.

OPERATIONAL BASICS

The EDGE in-cab backhoe features include a powerful 9'4" (2850 mm) digging depth, 10'11" (3340 mm) reach and 180 degree pivot rotation. Vertical stabilizers and 40" (1016 mm) side-shift allow you to operate next to buildings, fence lines or other obstacles. Cushioned swing pads at three points offer smooth stop at maximum swing and stick retract.

Four bucket sizes are available from 12" (300 mm) to 24" (600 mm) for any size trenching job. Comes standard with auxiliary hydraulics, hoses and flat face couplers.

BUCKET SPECIFICATIONS

Bucket Size (in/mm)	Weight (Ib/kg)	Number of Teeth			
12/300	120/54	3			
16/400	160/73	3			
20/500	200/91	4			
24/600	240/109	4			





Buckets range from 12" to 24"


FEATURES

- Allows operator to remain in the cab while operating the backhoe and the skid/track loader controlsDigging depths from 9'4" (2850 mm) to 11'1" and 10'11" (3340 mm) reach
- Vertical stabilizers and 40" (1016 mm) side-shift allow you to operate next to buildings, fences or other obstacles
- Bucket sizes range from 12" (2300 mm) to 24" (600 mm) and come standard with teeth
- Cushioned swing pads at three points offer smooth stop at maximum swing and stick retract



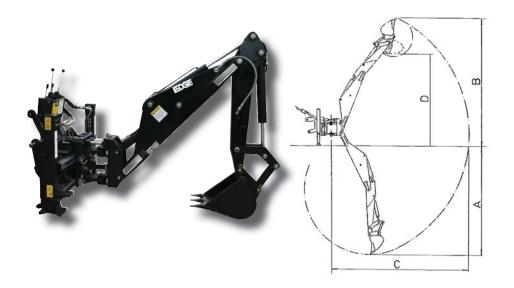





SPECIFICATIONS

	Description	BHO9IC				
А	Digging Depth	112" / 2850 mm				
В	Maximum Height	131" / 2240 mm				
С	Horizontal Reach	131" / 3340 mm				
D	Unloading Height	85" / 2170 mm				
Е	Ground Clearance	15" / 380 mm				
F	Carriage Width	59" / 1499 mm				
G	Overall Width	61.5" / 1562 mm				
Н	Side Shift	40" / 1016 mm				
Ι	Boom Pivot Height	89" / 2250 mm				
J	Stabilizer Down Max	20" / 500 mm				
	Swing Arc	180°				
	Bucket Rotation	206°				
	Weight Without Bucket	1433 lb / 650 kg				
	Swing, Booms and Bucket Controls	Two Hand Levers				
	Stabilizer Controls	Two Hand Levers				
	Auxiliary Hydraulic Controls	One Hand Lever				
	Hydraulic Circuit for Attachments	Yes				
	Valves Protecting Hydraulic Circuit	Yes				
	Valves Protecting Auxiliary Hydraulic Circuit	Yes				
	Pressure Measuring Valves	Yes				



Compacts for Transportation

	Radial Skid Loaders					Vertical Skid Loaders			Track Loaders				
Machine Compatibility Gehl / Mustang	3640E/ 2026	R135/ 1350R	R150/ 1500R	R165/ 1650R	R190/ 1900R	R220/ 2200R	R260/ 2600R	V270/ 2700V	V330 3300V	V400/ 4000V	RT175/ 1750RT	RT210/ 2100RT	RT250/ 2500RT
*In-Cab Backhoe	•	*	•	*	*	•	*	*	*	•	•	•	

*Note: Machine compatibility is based on operating capacity of the machine and the weight of the attachment

