



# SKID STEER LOADERS

2054



# PREPARE TO DIG, LIFT and HAUL

## SPECIFICATIONS



**MOVE MORE** ▲ with an operating capacity of 1,750 lbs. (with optional counterweight) for exceptional lifting and loading capabilities.



**EXTRA MUSCLE** ▲ for tough jobs with breakout forces up to 5,000 lbs.

**CUSTOMIZEABLE** ▲ control configurations, including dual lever with foot controls, dual lever with hand controls, and T-bar with hand controls.




**MULTI-TASK** ▲ with a wide variety of attachments are powered by strong, auxiliary hydraulics with standard flat-faced couplers.



**STURDY** ▲ Level II-certified ROPS/FOPS structure provides protection, yet allows an unobstructed view to the attachment and surrounding work areas.

		2054
<b>DIMENSIONS</b>	A. Overall Operating Height - Fully Raised (mm)	146.5" (3721)
	B. Height to Hinge Pin - Fully Raised (mm)	116" (2946)
	C. Overall Height to Top of ROPS (mm)	77.7" (1974)
	D. Ground Clearance to Chassis (mm)	7.8" (197)
	E. Overall Length with Bucket (mm)	125.5" (3188)
	F. Overall Length without Bucket (mm)	97" (2448)
	G. Wheelbase (mm)	38.5" (978)
	H. Dump Reach at Full Height (mm)	24" (610)
	I. Bucket Rollback at Ground	28°
	J. Dump Angle	34°
	K. Overall Width (mm)	60.8" (1544)
	L. Bucket Width (mm)	61.5" (1562)
	M. Clearance Circle - Rear (mm)	59.3" (1506)
	N. Clearance Circle - Front without Bucket (mm)	45.8" (1162)
	O. Clearance Circle - Front with Bucket (mm)	74.5" (1892)
	P. Seat to Ground Height (mm)	34.8" (884)
Q. Rollback at Full Height	100°	
R. Dump Height (mm)	92" (2337)	
S. Departure Angle	26°	
Standard Specification Tire Size		10.00 x 16.5 HD
<b>ENGINE</b>	Make	Yanmar
	Model	4TNV88 - Interim Tier IV
	Power (kW) @ rpm	46 hp (34.2) @ 2600
	Displacement (L)	134 cu.in. (2.2)
	Maximum Torque (Nm) @ rpm	106 ft.-lbs. (145) @ 1680
<b>HYDRAULIC SYSTEM</b>	Auxiliary Hydraulics - Standard (L/min)	18 gpm (68.1)
	High-Flow Hydraulics - Optional (L/min)	28 gpm (106)
	System Relief Pressure (bar)	2850 psi (197)
	Reservoir Capacity (L)	12 gal. (45)
<b>CAPACITIES / WEIGHT</b>	Rated Operating Capacity <sup>A</sup> (kg)	1650 lbs. (748)
	With Optional Counterweight <sup>A</sup> (kg)	1750 lbs. (794)
	Tipping Load (kg)	3300 lbs. (1497)
	Fuel Tank (L)	15 gal. (57)
	Travel Speed - Maximum (km/hr)	6.8 mph (10.9)
	Operating Weight <sup>B</sup> - Approximate (kg)	6080 lbs. (2758)

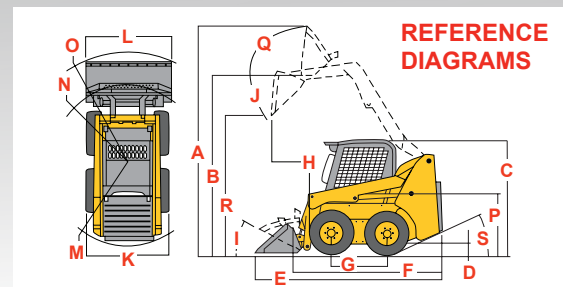

A Per SAE J818, SAE J732, and ISO 14397

B Unit weight with standard bucket, 175 lbs. (79 kg) operator and full fuel tank



For more information on Mustang Skid Steer Loaders and the rest of the Mustang equipment line, call our hotline at

**1-800-628-0491**

or visit [mustangmfg.com](http://mustangmfg.com)

West Bend, WI USA  
Tel: 262-334-9461  
Fax: 262-338-7517